


WE cable.

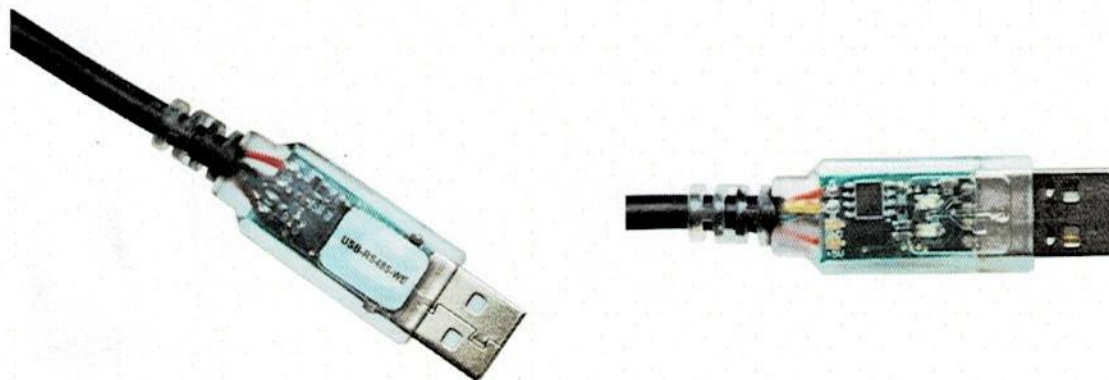

Snímky převodníku

USB-RS485-WE Cable Signal Descriptions

Colour	Name	Type	Description
Black	GND	GND	Device ground supply pin.
Brown	Terminator 1	Input	Pin 1 of 120R Terminating Resistor. Only Required if the USB-RS485-WE cable is the first or last device in a multi-drop RS485 System, to meet RS485 Termination Requirements.
Red	POWER	Output	Default output is +5V when active, 0V during suspend. Switchable power to <u>external device</u> , 250mA max.
Orange	Data+(B)	Bi-Direction	Data + RS-485 'B' Signal
Yellow	Data-(A)	Bi-Direction	Data - RS-485 'A' Signal
Green	Terminator 2	Input	Pin 2 of 120R Terminating Resistor. Only Required if the USB-RS485-WE cable is the first or last device in a multi-drop RS485 System, to meet RS485 Termination Requirements.

USB-RS485-WE Cable Signal Descriptions