



Current measuring module 800-CT8-LP

Data sheet

Current measuring module 800-CT8-LP



Module for UMG 801 (from firmware 1.5.0)

Doc.-Nr.: 2.053.113.0.b

Status: 05/2023

The German version is the original version of the documentation.

Subject to technical changes


The content of our documentation has been compiled with the utmost care and is based on the latest information available to us. Nevertheless, we would like to point out that the updating of this document cannot always be performed simultaneously with the further technical development of our products. Information and specifications can be changed at any time.

Please consult www.janitza.com for information on the current version.

Device views

- The figures serve as illustrations and are not true to scale.
- Dimensions in mm (in).

Front view

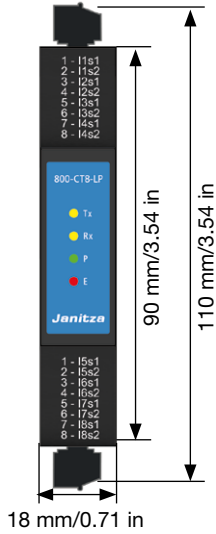


View from below




View from above




View from the left

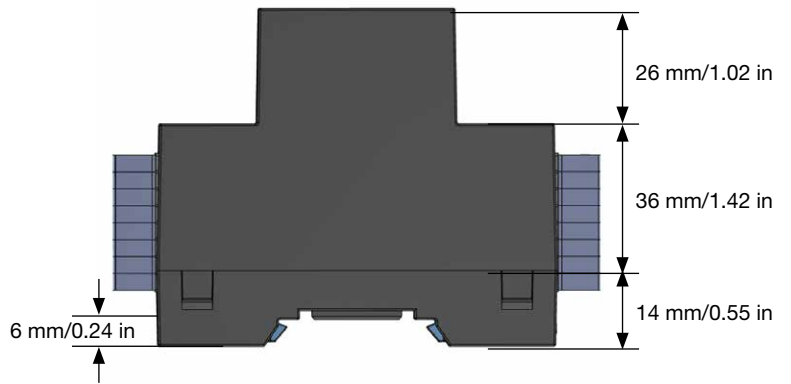

Rear view

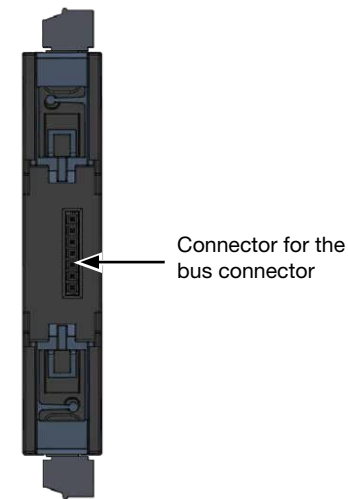

Communication bus connector for the module 800-CT8-LP

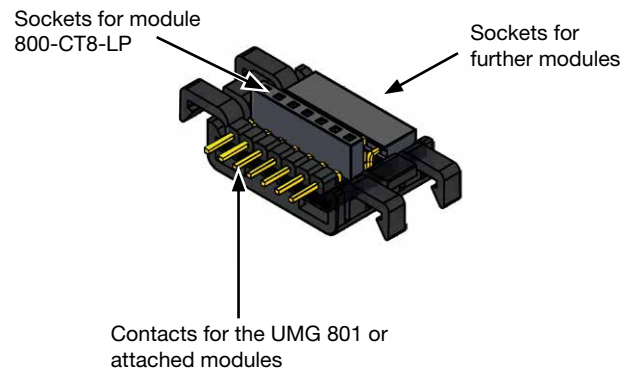

Technical data

General information	
Net weight (with plug-in terminals)	73 g (0.16 lb)
Device dimensions (without plug-in terminals)	B = 18 mm (w = 0.71 in), H = 90 mm (h = 3.54 in), T = 76 mm (d = 2.99 in)
Installation position discretionary	discretionary
Mounting/assembly - suitable DIN rails (35 mm / 1.38 in)	<ul style="list-style-type: none"> · TS 35/7,5 according to EN 60715 · TS 35/10 · TS 35/15 x 1,5
Protection against foreign matter and water	IP20 according to EN60529
Impact resistance	IK07 according to IEC 62262

Transport and storage	
The following information applies to devices which are transported and stored in the original packaging.	
Free fall	1 m (39.37 in)
Temperature	K55: -25 °C (-13 °F) to +70 °C (158 °F)
Relative humidity	0 to 95% at 25 °C (77 °F) non-condensing

Ambient conditions during operation	
The module <ul style="list-style-type: none"> · operate with basic device UMG 801 from firmware 1.5.0. · must be used in a weather-protected, stationary application. · fulfills the operating conditions according to DIN IEC 60721-3-3. · possesses protection class II according to IEC 60536 (VDE 0106, Part 1), a ground wire connection is not required! 	
Measurement temperature range	-10 °C (14 °F) to +55 °C (131 °F)
Relative humidity	5 to 95% at 25 °C (77 °F) non-condensing
Pollution degree	2
Ventilation	No external ventilation required.
Supply voltage	Through the UMG 801 basic device

Current measurement	
Measurement via low-power current transformers with a secondary voltage of	.. / 0 - 400 mV
Channels	8 (2x4) <ul style="list-style-type: none"> · 2 systems (L1, L2, L3, N) · Single channels
Input impedance per channel	230 kΩ
Nominal input signal of the module	0 .. 400 mV
Crest factor	1.8
Overload for 1 s	1 V
Resolution	16 bit
Sampling frequency	6.8 kHz
Frequency of the fundamental oscillation	40 Hz .. 70 Hz
Harmonics	1. .. 15. (odd only)

Interface and energy supply	
JanBus (proprietary)	· Via bus connector · Max. bus length (JanBus) 100 m.
Supply voltage (via JanBus interface)	24 V

Connection capacity of the terminals – 800-CT8-LP module	
Connectible conductors Only connect one conductor per terminal point!	
Single core, multi-core, fine-stranded	0.2 - 1.5 mm ² , AWG 24-16
Wire ferrules (non-insulated)	0.2 - 1.5 mm ² , AWG 26-16
Wire ferrules (insulated)	0.2 - 1 mm ² , AWG 26-18
Wire ferrules: Length of the contact sleeve	7 mm (0.2756 in)
Tightening torque Screw flange	0.2 - 0.25 Nm (1.77 - 2.21 lbf in)

Module 800-CT8-LP LEDs	
Tx (send data)	Flash "orange" during operation and indicate cyclic data exchange.
Rx (receive data)	
P (power - power supply)	Lights up "green" when the power supply via the JanBus interface is correct.
E (error - initialization and malfunction)	Lights up "red" when initializing/starting the device and in the event of a fault.

ⓘ INFORMATION

Detailed information on the functions and data of the basic device can be found in the usage information included with the basic device or available for download at www.janitza.com!

Performance characteristics of functions

Function	Symbol	Accuracy class - 333 mV nominal voltage	Display range
Total active power	P	0.5 (IEC61557-12)	0 .. 999 GW
Total reactive power	QA, Qv	1 (IEC61557-12)	0 .. 999 Gvar
Total apparent power	SA, Sv	0.5 (IEC61557-12)	0 .. 999 GVA
Total active energy	Ea	0.5 (IEC61557-12) 0.5S (IEC62053-22)	0 .. 999 GWh
Total reactive energy	ErA, ErV	1 (IEC61557-12)	0 .. 999 Gvarh
Total apparent energy	EapA, EapV	0.5 (IEC61557-12)	0 .. 999 GVAh
Phase current	I	0.2 (IEC61557-12)	0 .. 999 kA
Neutral conductor current calculated	INc	1.0 (IEC61557-12)	0.03 .. 999 kA
Power factor	PFA, PFV	1 (IEC61557-12)	0.00 .. 1,00
Current harmonics	Ih	Cl. 1 (IEC61000-4-7)	0 A .. 999 kA
THD of the current	THD _I	1.0 (IEC61557-12)	0 .. 999 %

Janitza electronics GmbH
Vor dem Polstück 6
D-35633 Lahnau
Support Tel. +49 6441 9642-22
Email: info@janitza.de
www.janitza.com

Janitza[®]